

ES8/ESM8 Speaker and Surface Mount Enclosures

The increasingly popular trend towards using square baffles and back-boxes has found many contractors using the AudioTrak ES8 enclosure. Constructed of 20-gauge steel, the ES8 also comes with a black epoxy undercoating to resist mechanical and acoustic vibrations. Use of industry standard mounting centers ensures the ES8 will work in any job. It is this versatility that has made the AudioTrak ES8 the contractor's preference for installations.



ES8



ESM8



Add to any square baffle comb speaker assembly for a complete speaker system.

Features

- One-piece welded construction
- Conduit knockouts
- Acoustic undercoating
- 8 - 32 U mount-clip baffle mounts

Specifications

	ES8	ESM8
Material	20-gauge steel	20-gauge steel
Finish	–	White enamel
Construction	One-piece spot welded	One-piece spot welded
Acoustic Dampening	Textured epoxy	–
Conduit Knockouts	0.8 to 1.14 inches; 20 to 29 mm	0.8 to 1.14 inches; 20 to 29 mm
Baffle Mounting Thread	8 - 32 U clips	8 - 32 U clips
Baffle Mounting Centers	11 inches; 279 mm lateral	11 inches; 279 mm lateral
Dimensions (L x W x D)	11.6 x 11.6 x 4 inches; 295 x 295 102 mm	12.9 x 12.9 x 4 inches; 328 x 328 x 102 mm
Weight	47.5 oz; 1.34 kg	45.9 oz; 1.30 kg

Architectural and Engineering Specifications


ES8

The speaker enclosure shall be an AudioTrak model ES8. The square enclosure shall be a single piece, welded unit constructed of 20-gauge steel. The enclosure shall have four combination 0.8 to 1.14 inches; 20 to 29 mm conduit knockouts, and the interior of the enclosure shall be coated with a textured black epoxy to prevent acoustic and mechanical vibration. The baffle shall provide four 8 - 32 U clips at 11 inches; 279 mm lateral centers for mounting of baffles. Mounting of T-bar support rails shall be provided for by four mounting slots on 7.36 inches; 187 mm centers placed along two opposite sides on a 180-degree axis. Overall enclosure dimensions shall be 11.6 inches; 295 mm by 11.6 inches; 295 mm square, 4 inches; 102 mm deep, and weigh 47.5 oz; 1.34 kg.

ESM8

The speaker enclosure shall be an AudioTrak model ESM8. The square enclosure shall be a single piece welded unit constructed of 20-gauge steel. The enclosure shall be painted in a white enamel finish and shall also come complete with two mounting tabs to facilitate surface mounting of the unit. The enclosure shall provide four baffle mounting capability through four baffle mounting holes with 8 - 32 U clips at 11 inches; 279 mm lateral centers. Overall enclosure dimensions shall be 12.9 inches; 328 mm by 12.9 inches; 328 mm square and 4 inches; 102 mm in depth with a total weight of 45.9 oz; 1.30 kg.

ES8

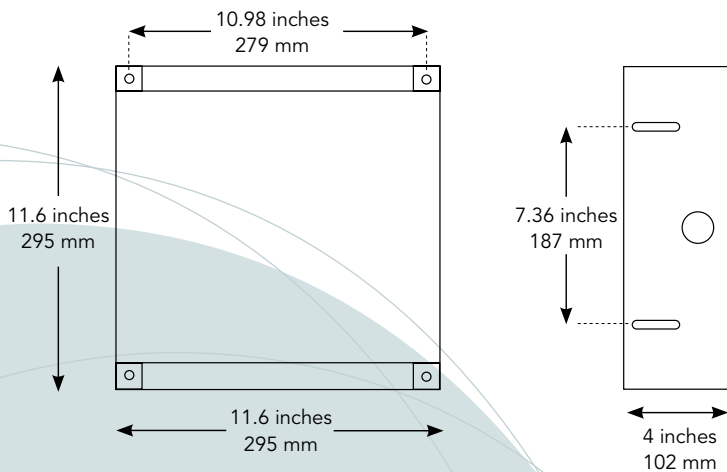

ESM8

